

## 116 & 118 Series Ball Valves



### Application

- Shipbuilding
- Natural gas plants
- Petroleum production & refining
- Mine and oil processing
- Chemical plants
- Power generation
- Plup and paper processing
- Food and other processing

### Feature

- 2-Piece & 3-Piece Body
- Variety of Flanged Connections :  
ANSI, JIS, DIN, SAE & ISO
- Fire safe Design
- Locking Device
- Optional Pressure relief hole in Ball
- Anti-Blow out proof stem
- Cavity relieving Seat
- Optional ISO 5211 mounting pad
- Anti-Static device



■ ■ ■ ■ ■ **Table of Contents**

1. Certificates	03
2. How to Order	04
3. Features	05
4. Floating Ball Valve	06
5. Trunnion Ball Valve	12
6. SAE J518 & ISO6164 BALL VALVE	18
7. Technical Information	22
8. Terms & Condition	23

## Top Quality

Customer Satisfaction

Global Operation

■ ■ ■ ■ ■ Certificates




**Hy-Lok** Ball Valves are designed and tested in accordance with API Q1, 6D and ASME B16.34 standards. The design for sour gas is based on NACE MR-01-75. Fire tests are performed in accordance with API 6FA BS6755, API 607 and BS 6755 standard. In addition to these basic standards and specifications, the Ball Valves meet the requirements of a range of other international specifications. Hy-Lok is able to apply any other standard specified by the customers.

	Certification
HSE (Health, Safety & Environment) Management System Certificates	ISO 14001
	OHSAS 18001
Quality Management System Certificates	ISO 9001
	ASME QSC
	API 6D / Q1
	CE MARK PED 97 / 23 / EC



# How to Order

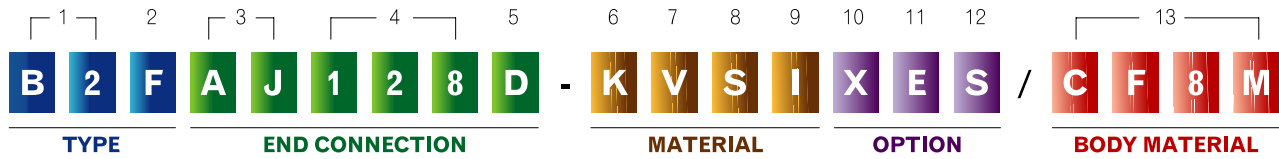

## TYPE

1. TYPE		2. BALL	
Code	Body Construction	Code	Ball Construction
B2	2 - Piece	F	Floating
B3	3 - Piece	T	Trunnion
B1	1 - Piece		

## END CONNECTION

3. END		4. SIZE		5. PRESSURE RATING							
Code	End Type	Code	Size	Code	ASME	API	JIS	DIN	SAE	ISO	SCH.
S	Socket Weld (ANSI / JIS)	8	1/2"	A	150	400	5 kg/cm <sup>2</sup>	PN 10	3000	250	5S
B	Butt Weld (ANSI / JIS)	12	3/4"	B	300	1500	10 kg/cm <sup>2</sup>	PN 16	6000	400	10S
M	Male Thread	16	1"	C	600	2000	16 kg/cm <sup>2</sup>	PN 25			20S
F	Female Thread	20	1 1/4"	D	900	2220	20 kg/cm <sup>2</sup>	PN 40			40S
BE	Extended Pipe Butt Weld	24	1 1/2"	E	1500	3000	30 kg/cm <sup>2</sup>	PN 64			80S
PE	Extended Pipe Plain	32	2"	F	2500	5000	40 kg/cm <sup>2</sup>	PN100			160S
<b>Flange</b>				G	4500	6000	63 kg/cm <sup>2</sup>	PN160			XXS
		48	3"	I	800	10000	210 kg/cm <sup>2</sup>	PN250			120S
		64	4"	K	400	15000	280 kg/cm <sup>2</sup>	PN320			
		80	5"	L		20000		PN420			
		96	6"								
		128	8"								

## MATERIAL

6. SEAT		7. SEAL		8. GASKET		9. BOLT		13. BODY / TRIM		
Code	Seat	Code	Seal	Code	Gasket	Code	Seal / Gasket	Code	Body	Trim
P	PTFE	V	Viton	S	316 Sprial Gasket	W	A193 B7 / 2H	WCB	A352 WCB	SS316
R	RTFE	W	Viton AED	G	Graphite	X	A193 B7M / 2H	LCB	A352 LCB	SS316
C	PCTFE	X	Viton GLT			B	A193 B8 / 8	LCC	A352 LCC	SS316
K	PEEK	Y	Viton AED / GLT			C	A193 B8M / 8M	CF8M	A351 CF8M	SS316
U	UHMWPE	N	NBR			L	A193 L7 / 7	CF3M	A351 CF3M	SS316
N	NYLON	H	HNBR			M	A193 L7M / 7M	MONO	Alloy 400	Monel
A	POM	E	EPDM					I625	Inconel 625	I625
M	METAL	K	KALEZ					F51	A182 F51	F51
		A	AFLAS					F316	A182 F316	SS316

## OPTION


10. BOLT COATING		11. ACTUATION		12. OTHER	
Code	Bolt Coating	Code	Operator	Code	Other
Z	Hot Dip Galvanize	B	Bare Stem	R	Reducing Bore
P	Coated PTFE	E	Electric Actuator	S	Sour Gas(NACE)
X	Cadinimium+PTFE	P	Pneumatinc Actuator		
		G	Manual Gear		
		M	Actuator Mount		

## For Example

B2FAR16B-RG / WCB      2-Piece, Floating, ANSI Flange, 1", Raised Force Class 300, RTFE, Graphite Packing, A352 WCB Body, 316 Trim, A193 B7 / 2H Bolt & Nut  
 B3TAJ32E-CG(R) / CF8M      3-Piece, Trunnion, ANSI Flange, 2", RTJ Class 1500, PCTFE, Graphite Packing, A351 CF8M Body, 316 Trim, A193 B8M / 8M Bolt & Nut  
 B2FEF32B-AG / F316      2-Piece, Floating, SAE Flange, 2", 6000 psig , POM , Viton O-Ring, Graphite Packing, A182 F316 Body, 316 Trim, A193 B8M / 8M Bolt & Nut


## Features

The Hy-Lok Ball valves are designed, manufactured and tested according to the most required international standards such as API, ANSI, ASME, DIN, BS, MSS etc...




### Firesafe Design

All Hy-Lok valves has a secondary metallic back up Firesafe seat, which ensures a metal to metal contact, in case the resilient seats would be disintegrated or burn-out by fire. To ensure the safety with fire, Hy-Lok ball valves have been Firesafe tested to BS 6755 part 2, API 607 & 6FA.




### Anti-Static Device

All Hy-Lok valves have an Anti-Static Device to avoid build-up of static electricity between stem and ball, and stem and body.




### Anti - Blow - Out Proof Stem

The Anti-Blow-Out Proof Stem is mounted from the inside of the valve and cannot blow-out in case of overpressure in the line, as they are retained by body of valve and not by the gland.



### Locking Device

In order to avoid any operational errors by unauthorized personal, Locking Device is provided as standards with full position.



### Pressure Relief Hole in Ball (Optional)


In case of high increase of temperature and pressure at the cavity of body, this hole emits the exceeded volume of gas & fluid so that ball is free from direct damage.

### Cavity Relieving Seat

The seats are designed in such a way that no overpressure can be built up in the cavity under temperature alternations.

### ISO 5211 Mounting Pad (Option)

Hy-Lok ball valves provide ISO 5211 direct mounting pad which ensures direct mount of gear operator or actuator to valves. It will cut expenses of additional mounting bracket for connection.

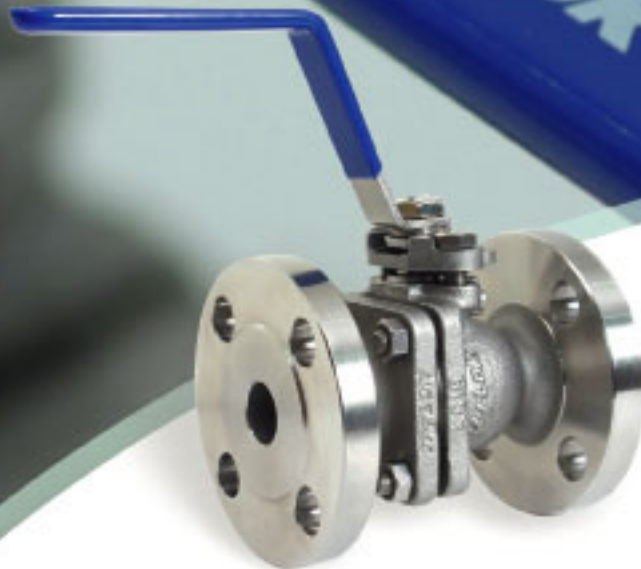

## **Floating Ball Valve**

Floating ball valves have been developed with incorporating many features according to latest API 6D standard approved. Complete split body design offers maximum protection against line pressure and thermal distortion with long life and trouble-free performance.

### **Applications :**

Gas Industry  
Chemical Industry  
Power plants

### **Features :**

Field repairable  
Bi-Direction flow  
Easy operation  
Anti-Static & Blow out proof stems

### **End Connections :**

ASME B16.10 RF, RTJ Flanged  
JIS Flanged

### **Construction :**

Free Floating Ball

### **Pressure Ratings :**

ASME Class 150 to 2500  
JIS 10K to 30K

### **Size Ranges :**

1/2" thru 8"

### **Temperature Ranges :**


From -46°C to 180°C  
Optional -196°C to 450°C

### **Standard Material :**

A351 CF8M, CF8, A351 CF3M,  
A216 WCB, A352 LCB, AL-Bronze,  
A105, LF2, F316, Monel, etc.

### **Fire Safety :**

API 607, API 6FA, BS 6755 Part-2




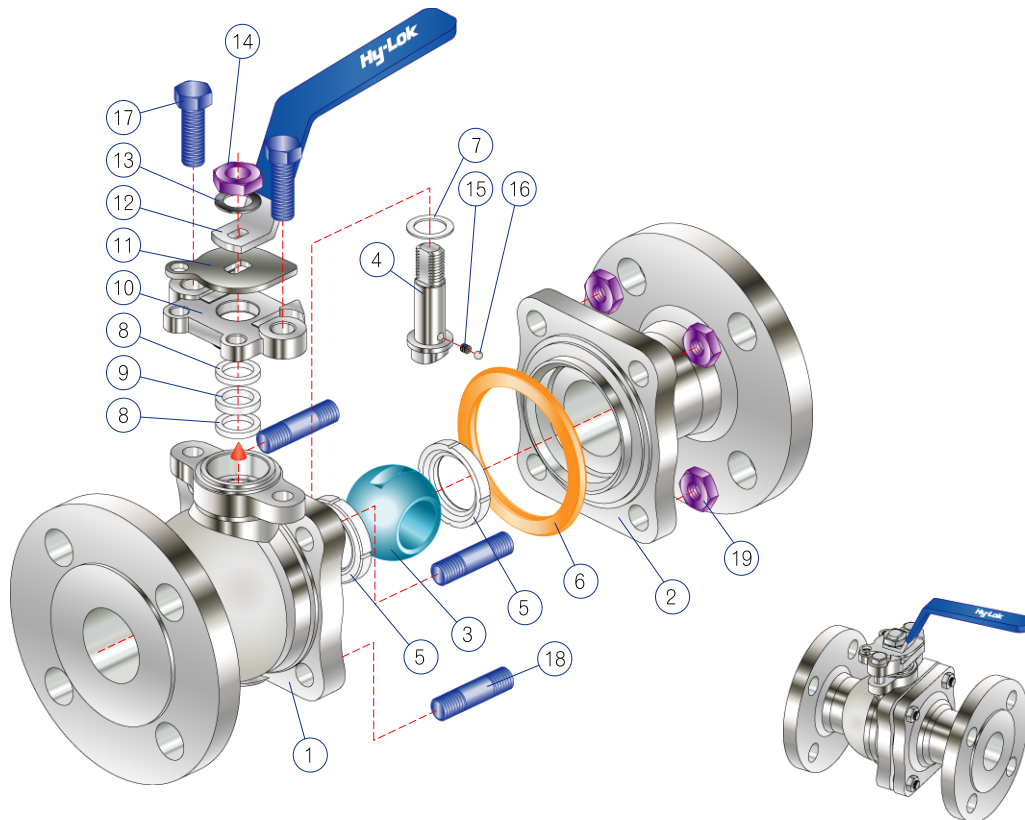


## Materials of Construction

No.	Description	Material*	
1	Body	ASTM A351 CF8M ASTM A182 F316	ASTM A216 WCB
2	Body Cap		ASTM A105
3	Ball	ASTM A479 TP316	
4	Stem	ASTM A479 TP316	
5	Seat	PTFE / PCTFE	
6	Gasket	PTFE / GRAPHITE / 316SS SPIRAL - WOUND	
7	Stem Washer	PTFE	
8	Stem Packing	GRAPHITE	
9	Stem Graphite	GRAPHITE	
10	Gland	ASTM A351 CF8M	ASTM A216 WCB
11	Stopper	STAINLESS STEEL	
12	Handle	CARBON / STAINLESS STEEL	
13	Washer	STAINLESS STEEL	
14	Nut	STAINLESS STEEL	
15	Anti Static Spring	STAINLESS STEEL	
16	Anti Static Stem Ball	STAINLESS STEEL	
17	Hex Bolt	ASTM A193 B8M	
18	Stud Bolt	ASTM A193 B8M	ASTM A193 B7
19	Nut	ASTM A194 8M	ASTM A194 2H

\*Other materials can be applied upon request

Raised Face to Face

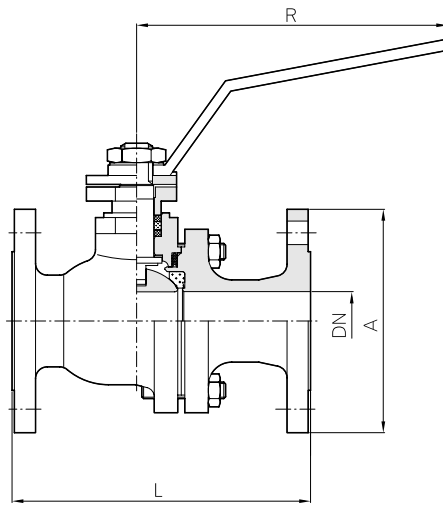

**ASME CLASS 150 RF** (mm)

SIZE	DN	A	L	R	Weight(kg)
1/2"	15	88,9	108	160	2,8
3/4"	20	98,4	117	160	3,7
1"	25	107,9	127	180	5,3
1 1/4"	32	117,5	140	180	6,6
1 1/2"	38	127,0	165	200	8,3
2"	51	152,4	178	200	11,2
2 1/2"	65	177,8	191	320	18,4
3"	76	190,5	203	320	23,0
4"	102	228,6	229	420	39,3
5"	127	254,0	356	600	69,3
6"	152	279,4	394	600	90,0
8"	203	342,9	457	800	140,0
10"	254	406,4	533	800	320,0
12"	305	482,6	610	800	500,0

**ASME CLASS 300 RF** (mm)






SIZE	DN	A	L	R	Weight(kg)
1/2"	15	95,2	140	160	3,0
3/4"	20	117,5	152	160	4,0
1"	25	123,8	165	180	6,6
1 1/4"	32	133,3	178	180	9,0
1 1/2"	38	155,6	190	200	12,9
2"	51	165,1	216	200	18,9
2 1/2"	64	190,5	241	320	28,0
3"	76	209,5	283	320	39,0
4"	102	254,0	305	420	60,0
5"	127	279,4	381	600	90,0
6"	152	317,5	403	600	130,0
8"	203	381,0	502	800	195,0
10"	254	444,5	568	800	400,0
12"	305	520,7	648	800	600,0

All dimensions are in millimeters unless otherwise specified. Dimensions are for reference only, subject to change.



**Raised Face to Face**

**Ring Type Joint Face to Face**

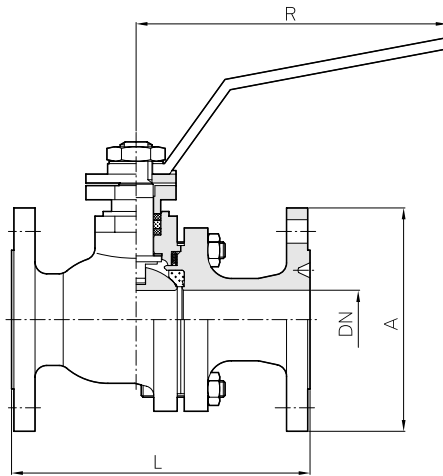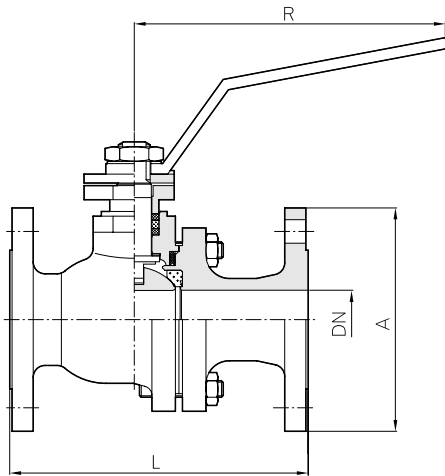






<b>ASME CLASS 600 RF</b> (mm)					
SIZE	DN	A	L	R	Weight(kg)
1/2"	15	95.2	165	245	4.0
3/4"	20	117.5	190	245	5.0
1"	25	123.8	216	245	8.0
1 1/4"	32	133.3	229	270	12.0
1 1/2"	38	155.6	241	270	15.0
2"	51	165.1	292	380	23.0
2 1/2"	64	190.5	330	380	33.0
3"	76	209.5	356	450	48.0
4"	102	273.0	432	600	80.0
5"	127	330.2	508	800	120.0
6"	152	355.6	559	800	156.0
8"	203	419.1	660	1000	224.0
10"	254	508.0	787	1000	419.0
12"	305	558.8	838	1000	584.0

<b>ASME CLASS 600 RTJ</b> (mm)					
SIZE	DN	A	L	R	Weight(kg)
1/2"	15	95.2	163	245	4.0
3/4"	20	117.5	190	245	5.0
1"	25	123.8	216	245	8.0
1 1/4"	32	133.3	229	270	12.0
1 1/2"	38	155.6	241	270	15.0
2"	51	165.1	295	380	23.0
2 1/2"	64	190.5	330	380	33.0
3"	76	209.5	359	450	48.0
4"	102	273.0	435	600	80.0
5"	127	330.2	511	800	120.0
6"	152	355.6	562	800	156.0
8"	203	419.1	663	1000	224.0
10"	254	508.0	790	1000	419.0
12"	305	558.8	841	1000	584.0

All dimensions are in millimeters unless otherwise specified. Dimensions are for reference only, subject to change.

**Raised Face to Face**

**Ring Type Joint Face to Face**

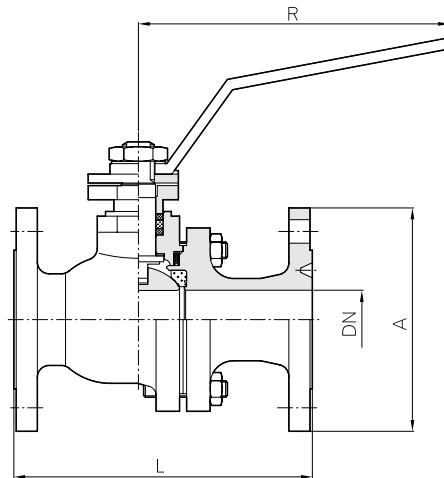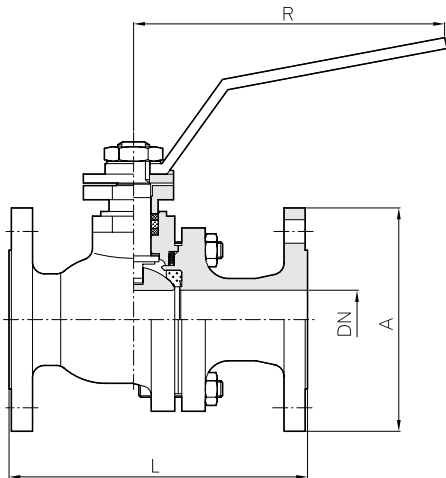

**ASME CLASS 900 RF/RTJ (mm)**

**ASME CLASS 1500 RF/RTJ (mm)**






SIZE	DN	A	L	R	Weight(kg)
1"	25	149,2	254	160	14,0
1 1/4"	32	158,7	279	160	13,5
1 1/2"	38	177,8	305	320	26,0
2"	51	215,9	368/371	320	38,0
2 1/2"	64	244,5	419/422	600	42,5
3"	76	241,3	381/384	600	50,0
4"	102	292,1	457/460	900	95,0

SIZE	DN	A	L	R	Weight(kg)
1"	25	149,2	254	160	14,0
1 1/4"	32	158,7	279	160	13,5
1 1/2"	38	177,8	305	320	26,0
2"	51	215,9	368/371	320	38,0
2 1/2"	64	244,5	419/422	600	42,5
3"	76	266,7	470/473	600	50,0
4"	102	311,1	546/549	900	95,0

All dimensions are in millimeters unless otherwise specified. Dimensions are for reference only, subject to change.

**Raised Face to Face**

**Ring Type Joint Face to Face**

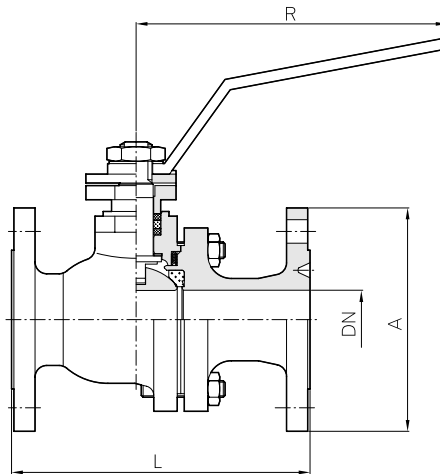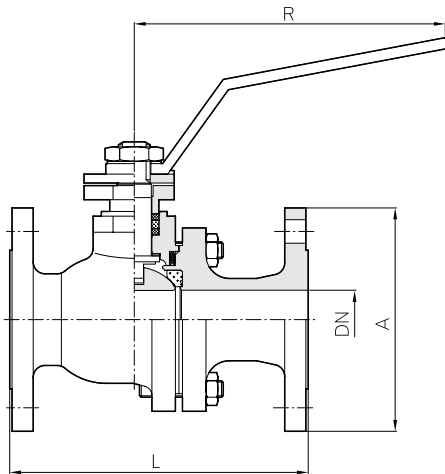

**ASME CLASS 2500 RF** (mm)

SIZE	DN	A	L	R	Weight(kg)
1"	25	158,8	308	160	15,8
1 1/4"	32	184,2	349	160	21,7
1 1/2"	38	203,2	384	320	29,5
2"	44	235,0	451	320	43,0
2 1/2"	54	266,7	508	600	47,8
3"	64	304,8	578	600	56,4
4"	89	355,6	673	900	105,0

**ASME CLASS 2500 RTJ** (mm)

SIZE	DN	A	L	R	Weight(kg)
1"	25	158,8	308	160	15,8
1 1/4"	32	184,2	352	160	21,7
1 1/2"	38	203,2	387	320	29,5
2"	44	235,0	454	320	43,0
2 1/2"	54	266,7	540	600	47,8
3"	64	304,8	584	600	56,4
4"	89	355,6	683	900	105,0

All dimensions are in millimeters unless otherwise specified. Dimensions are for reference only, subject to change.



## **Trunnion Ball Valve**

Trunnion ball valves have been developed with incorporating many features according to highest API 6D standard approved. Complete split body design offers maximum protection against line pressure and thermal distortion with long life and trouble-free performance.

### **Applications :**

Oil Refinery Rigs  
Gas Industry  
Power Units

### **Features :**

Field repairable  
Bi-Direction flow  
Cavity relieving seats  
Anti-Static & Blow out proof stems

### **End Connections :**

ASME B16.10 RF, RTJ Flanged

### **Construction :**

Trunnion Ball

### **Pressure Ratings :**

ASME Class 150 to 2500

### **Size Ranges :**

2" thru 4"

### **Temperature Ranges :**


From -46°C to 230°C  
Optional -196°C to 450°C

### **Standard Material :**

A351 CF8M, CF8, CF3M  
A182 F316, F316L, A105, LF2, F51, F53, I625, etc..

### **Fire Safety :**

API 607, API 6FA, BS 6755 Part-2



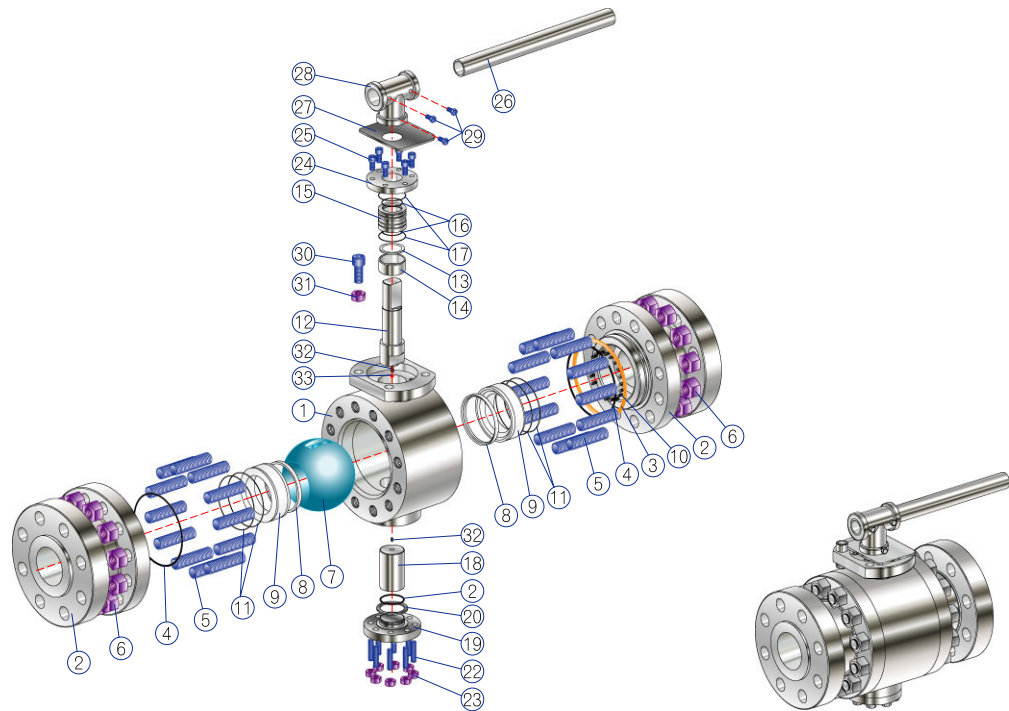


## Materials of Construction

No.	Description	Material*	
1	Body	ASTM A351 CF8M	ASTM A216 WCB
2	End Connection	ASTM A182 F316	ASTM A105
3	End Connection Gasket	PTFE / GRAPHITE / 316SS-SPIRAL WOUND	
4	End Connection O-Ring	NBR	
5	End Connection Bolt	ASTM A193 B8M	ASTM A193 B7
6	End Connection Nut	ASTM A194 8M	ASTM A194 2H
7	Ball	ASTM A479 TP316	
8	Seat	PTFE / PCTFE	
9	Seat Holder	STAINLESS STEEL	
10	Seat Spring	STAINLESS STEEL	
11	Seat O-Ring	NBR	
12	Stem	ASTM A479 TP316	
13	Thrust Seal	316SS + PTFE	
14	Dry Bearing	316SS + PTFE	
15	Stem Bush	STAINLESS STEEL	
16	Bush Inner O-Ring	NBR	
17	Bush Outer O-Ring	NBR	
18	Trunnion	STAINLESS STEEL	
19	Trunnion Cover	ASTM A351 CF8M	ASTM A216 WCB
20	Trunnion Gasket	PTFE/GRAPHITE/316SS-SPIRAL WOUND	
21	Trunnion O-Ring	NBR	
22	Trunnion Cover Bolt	ASTM A193 B8M	ASTM A193 B7
23	Trunnion Cover Nut	ASTM A194 8M	ASTM A194 2H
24	Gland Flange	ASTM A351 CF8M	ASTM A216 WCB
25	Gland Bolt	ASTM A193 B8M	ASTM A193 B7
26	Handle	STAINLESS STEEL	
27	Stopper	STAINLESS STEEL	
28	Lever Socket	STAINLESS STEEL	
29	Lever Set Bolt	STAINLESS STEEL	
30	Stopper Bolt	STAINLESS STEEL	
31	Stopper Nut	STAINLESS STEEL	
32	Anti Static Spring	STAINLESS STEEL	
33	Anti Static Ball	STAINLESS STEEL	

\*Other materials can be applied upon request

Raised Face to Face

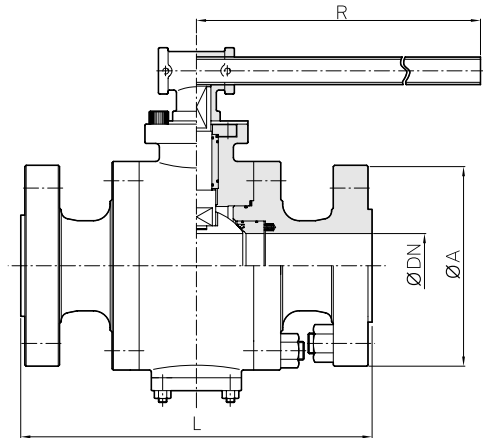





ASME CLASS 150 RF (mm)					
SIZE	DN	A	L	R	Weight(kg)
2"	50	152,4	178	220	20,0
2 1/2"	65	177,8	191	320	31,0
3"	76	190,5	203	320	41,0
4"	100	228,6	229	420	65,0
5"	125	254,0	356	420	109,0
6"	150	279,4	394	600	152,0
8"	203	342,9	457	800	220,0
10"	253	406,4	533	800	415,0
12"	303	482,6	610	800	580,0

ASME CLASS 300 RF (mm)					
SIZE	DN	A	L	R	Weight(kg)
2"	50	165,1	216	220	41,0
2 1/2"	65	190,5	241	320	51,0
3"	76	209,5	283	320	60,0
4"	100	200,0	305	420	100,0
5"	125	234,9	381	420	139,0
6"	150	269,9	403	600	178,0
8"	203	330,2	502	800	190,0
10"	253	444,5	568	800	480,0
12"	303	520,7	648	800	650,0

All dimensions are in millimeters unless otherwise specified. Dimensions are for reference only, subject to change.

**Raised Face to Face**

**Ring Type Joint Face to Face**


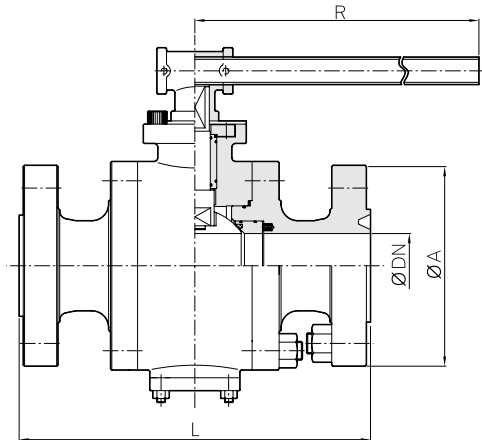
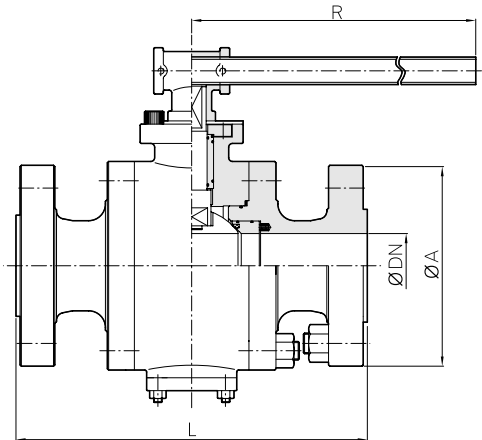


ASME CLASS 600 RF (mm)					
SIZE	DN	A	L	R	Weight(kg)
2"	50	165.1	292	220	49.0
2 1/2"	65	190.5	330	320	62.0
3"	76	209.5	356	320	75.0
4"	100	273.0	432	420	147.0
5"	127	330.2	508	420	200.0
6"	150	355.6	559	600	253.0
8"	203	419.1	660	800	500.0
10"	253	508.0	787	1000	760.0
12"	303	558.8	838	1000	1100.0

ASME CLASS 600 RTJ (mm)					
SIZE	DN	A	L	R	Weight(kg)
2"	50	165.1	295	220	49.0
2 1/2"	65	190.5	333	320	62.0
3"	76	209.5	359	320	75.0
4"	100	273.0	435	420	147.0
5"	127	330.2	501	420	200.0
6"	150	355.6	562	600	253.0
8"	203	419.1	664	800	500.0
10"	253	508.0	791	1000	760.0
12"	303	558.8	841	1000	1100.0

All dimensions are in millimeters unless otherwise specified. Dimensions are for reference only, subject to change.

Ring Type Joint Face to Face

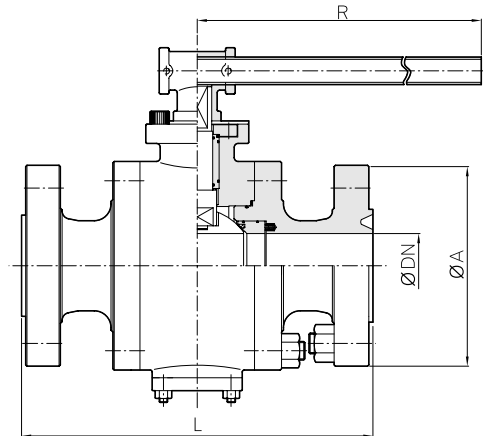

**ASME CLASS 900 RF/RTJ** (mm)

SIZE	DN	A	L	R	Weight(kg)
2"	50	215,9	368/371	280	60,0
2 1/2"	65	244,5	419/422	400	73,0
3"	76	241,3	381/384	400	86,0
4"	100	292,1	457/460	650	180,0
6"	150	381,0	610/613	800	397,0
8"	203	471,0	737/740	800	651,0
10"	253	546,0	838/841	800	977,0
12"	303	611,0	965/968	800	1353,0




**ASME CLASS 1500 RF/RTJ** (mm)

SIZE	DN	A	L	R	Weight(kg)
2"	50	215,9	368/371	400	60,0
2 1/2"	65	244,5	419/422	650	86,0
3"	76	266,7	470/473	650	111,0
4"	100	311,1	546/549	800	184,0
6"	144	396,0	705/711	800	468,0
8"	194	486,0	832/841	800	773,0
10"	240	586,0	991/1000	800	1170,0
12"	287	676,0	1130/1146	800	1618,0

All dimensions are in millimeters unless otherwise specified. Dimensions are for reference only, subject to change.



Ring Type Joint Face to Face

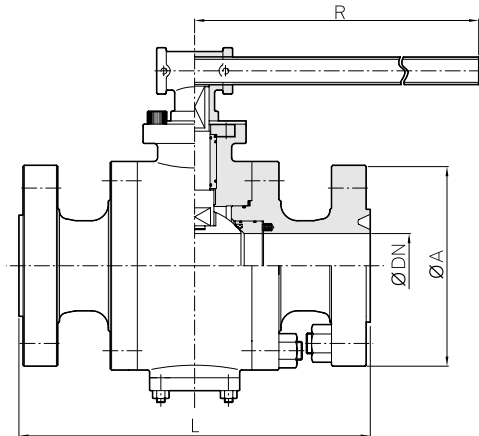

**ASME CLASS 2500 RTJ** (mm)

SIZE	DN	A	L	R	Weight(kg)
2"	44	235.0	451/454	400	120.0
3"	64	304.8	578/584	500	222.0
4"	89	355.6	673/683	600	368.0
6"	131	486.0	914/927	800	763.0
8"	181	551.0	1022/1038	800	2004.0
10"	224	676.0	1270/1292	800	3042.0
12"	265	761.0	1422/1445	800	4202.0

All dimensions are in millimeters unless otherwise specified. Dimensions are for reference only, subject to change.



## **SAE J518 & ISO 6164 Ball Valve**

SAE J518 & ISO6164 flanged ball valves are units which serve to shut off the flow of an operating medium in both directions

### **Applications :**

Marine Hydraulics  
Power Units  
Oil & Gas Refinery Rigs

### **Features :**

Compact design  
2-Way wafer style  
Easy operation  
Blow out proof stems

### **End Connections :**

SAE J518 Code 61/62 Flanged  
ISO 6164 Flanged

### **Pressure Ratings :**

SAE J518 Code 61 : 3000 psi to 5"  
SAE J518 Code 62 : 6000 psi to 3"  
ISO 6164 : PN 250, PN 400 to 6"

### **Size Ranges :**


1/2" thru 6" Full Bore

### **Temperature Ranges :**

From -46°C to 230°C



### **Standard Material :**

A182 F316, F316L, A105, LF2

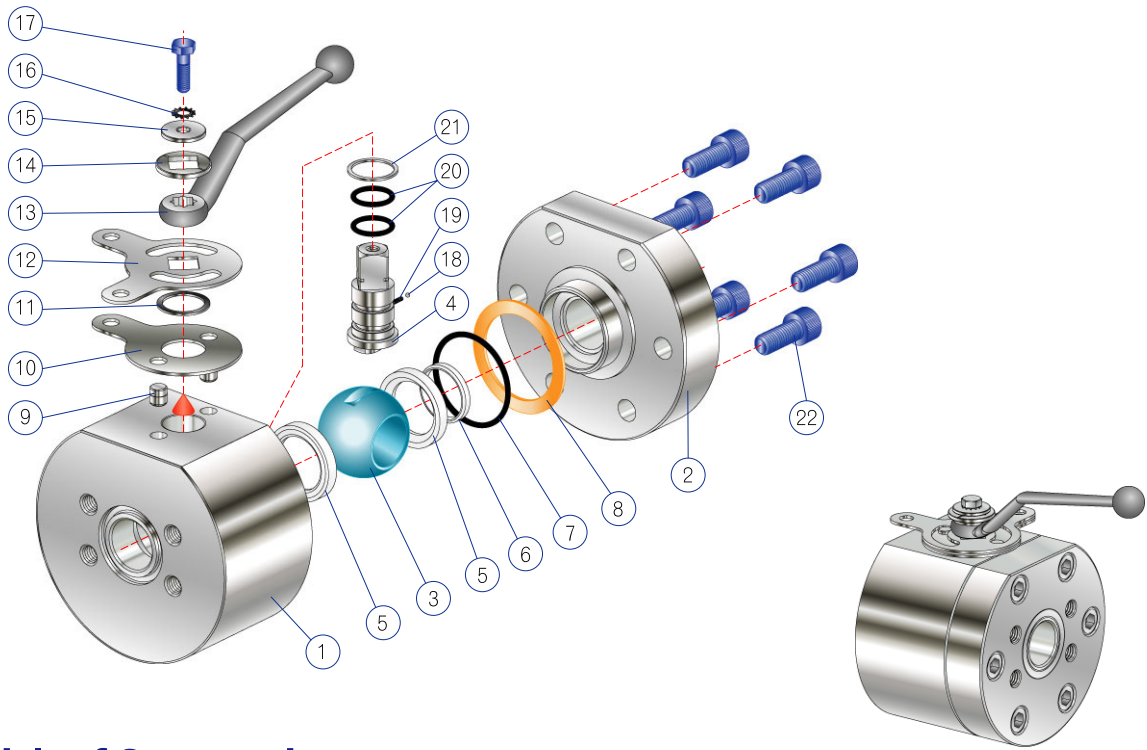

**Materials of Construction**

No.	Description	Material*	
1	Body	ASTM A182 F316	ASTM A105
2	End Connection		
3	Ball	ASTM A479 TP316	
4	Stem	ASTM A479 TP316	
5	Seat	POM	
6	Inner Ring	ASTM A479 TP316	
7	O - Ring	VITON	
8	End Packing	GRAPHITE	
9	Stop Pin	STAINLESS STEEL	
10	Lower Plate	STAINLESS STEEL	
11	Washer	POM	
12	Upper Plate	STAINLESS STEEL	
13	Handle	STAINLESS STEEL	
14	Washer	STAINLESS STEEL	
15	Upper Washer	STAINLESS STEEL	
16	Tooth Washer	STAINLESS STEEL	
17	Hex. Bolt	STAINLESS STEEL	
18	Anti Static Ball	STAINLESS STEEL	
19	Anti Static Spring	STAINLESS STEEL	
20	O - Ring	VITON	
21	Trust Bearing	POM	
22	Wrench Bolt	ASTM A193 B8M	ASTM A193 B7

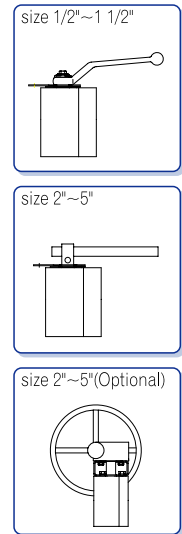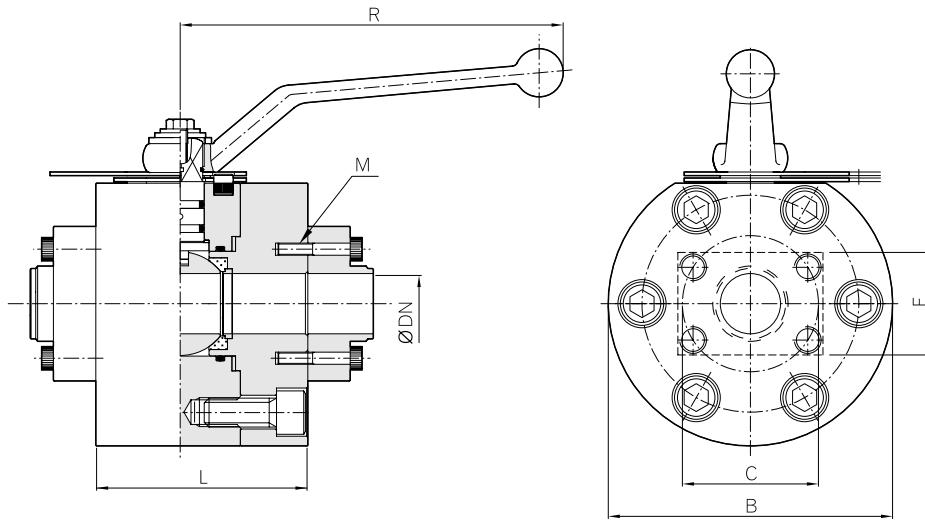

**SAE J518 CODE 61 #3000**



(mm)

SIZE	DN	L	R	M		B	C	E	Weight(kg)
1/2"	13	75	115	5/16" - 18UNC x L35	M8 - 1,25P x L35	78	38.1	17.5	2.5
3/4"	20	80	160	3/8" - 16UNC x L35	M10 - 1,50P x L35	98	47.6	22.2	3.9
1"	25	88	160	3/8" - 16UNC x L40	M10 - 1,50P x L40	118	52.4	26.2	6.0
1 1/4"	32	100	160	7/16" - 14UNC x L40	M10 - 1,50P x L40	145	58.7	30.2	11.6
1 1/2"	38	110	320	1/2" - 13UNC x L40	M12 - 1,75P x L40	165	69.9	35.7	16.2
2"	50	116	320	1/2" - 13UNC x L45	M12 - 1,75P x L45	198	77.8	42.9	24.9
2 1/2"	63	150	600	1/2" - 13UNC x L50	M12 - 1,75P x L50	198	88.9	50.8	33.3
3"	76	180	600	5/8" - 11UNC x L60	M16 - 2,00P x L60	210	106.4	61.9	40.0
4"	100	170	900	5/8" - 11UNC x L55	M16 - 2,00P x L55	258	130.2	77.8	59.5
5"	125	210	900	5/8" - 11UNC x L65	M16 - 2,00P x L65	300	152.4	92.1	88.0

**SAE J518 CODE 62 #6000**

(mm)

SIZE	DN	L	R	M		B	C	E	Weight(kg)
1/2"	13	75	115	5/16" - 18UNC x L35	M8 X 1,25P x L35	78	40.5	18.2	2.5
3/4"	20	80	160	3/8" - 16UNC x L40	M10 X 1,50P x L40	98	50.8	23.8	3.9
1"	25	88	160	7/16" - 14UNC x L40	M12 X 1,75P x L40	118	57.2	27.8	6.0
1 1/4"	32	100	160	1/2" - 13UNC x L45	M14 X 2,00P x L45	145	66.7	31.8	11.6
1 1/2"	38	120	320	5/8" - 11UNC x L55	M16 X 2,00P x L55	165	79.4	36.5	16.4
2"	50	130	320	3/4" - 10UNC x L65	M20 X 2,50P x L65	198	96.8	44.5	24.9
2 1/2"	63	150	600	1" - 8UNC x L60	M24 X 3,00P x L60	198	123.8	58.7	33.3
3"	76	180	600	1 1/8" - 8UNC x L85	M30 X 3,50P x L85	210	152.4	71.6	40.0

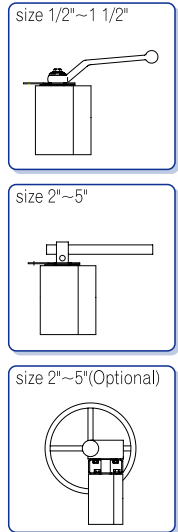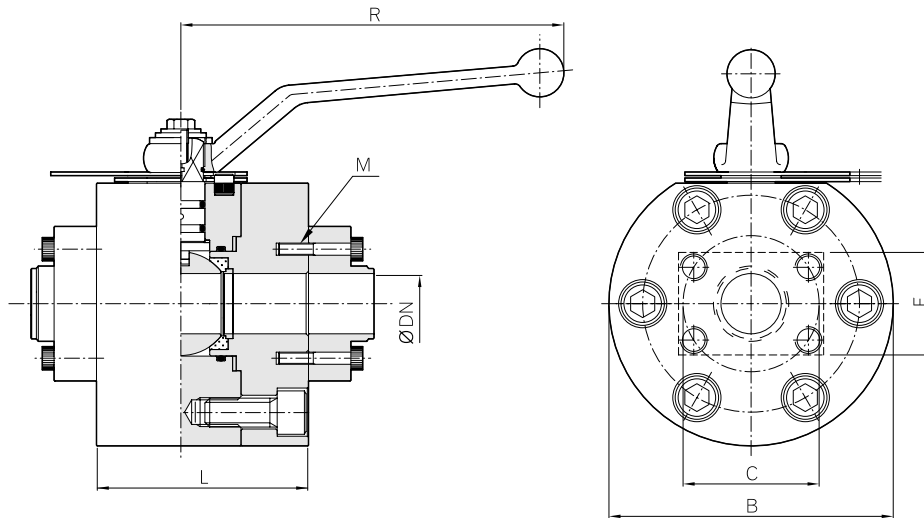

**ISO 6164-1 250bar**

(mm)

SIZE	DN	L	R	M		B	C	E	Weight(kg)
1/2"	14	75	115	3/8" - 16UNC x L35	M10 - 1.50P x L35	78	54	60	2,5
3/4"	19	80	160	7/16" - 14UNC x L35	M12 - 1.75P x L35	98	64	70	3,9
1"	24	88	160	7/16" - 14UNC x L40	M12 - 1.75P x L40	118	72	80	6,0
1 1/4"	32	100	160	5/8" - 11UNC x L40	M16 - 2.00P x L40	145	80	90	11,6
1 1/2"	32	110	320	5/8" - 11UNC x L45	M16 - 2.50P x L40	165	80	90	16,2
2"	38	116	320	5/8" - 11UNC x L45	M16 - 2.50P x L45	198	98	100	24,9
2 1/2"	50	150	600	3/4" - 10UNC x L65	M20 - 2.50P x L65	198	118	120	33,3
3"	63	180	600	1" - 8UNC x L75	M24 - 3.00P x L75	210	145	145	40,0
4"	76	170	900	1 1/8" - 8UNC x L90	M30 - 3.50P x L90	258	175	180	59,5
5"	100	210	900	1" - 8UNC x L100	M24 - 3.00P x L100	300	205	245	88,0
6"	132	260	1200	1 1/8" - 8UNC x L100	M30 - 3.50P x L100	360	245	300	182,0

**ISO 6164-2 400bar**

(mm)

SIZE	DN	L	R	M		B	C	E	Weight(kg)
1/2"	6	75	115	3/8" - 16UNC x L35	M10 - 1.50P x L35	78	54	60	2,5
3/4"	11	80	160	3/8" - 16UNC x L40	M10 - 1.50P x L40	98	54	60	3,9
1"	15	88	160	7/16" - 14UNC x L40	M12 - 1.75P x L40	118	64	70	6,0
1 1/4"	23	100	160	7/16" - 14UNC x L45	M12 - 1.75P x L45	145	72	80	11,6
1 1/2"	32	120	320	5/8" - 11UNC x L45	M16 - 2.50P x L40	165	80	90	16,4
2"	38	116	320	5/8" - 11UNC x L45	M16 - 2.50P x L45	198	98	100	24,9
2 1/2"	50	150	600	3/4" - 10UNC x L65	M20 - 2.50P x L65	198	118	120	33,3
3"	63	180	600	1" - 8UNC x L75	M24 - 3.00P x L75	210	145	145	40,0
4"	76	170	600	1 1/8" - 8UNC x L90	M30 - 3.50P x L90	258	175	180	59,5
5"	100	210	900	1" - 8UNC x L100	M24 - 3.00P x L100	300	205	245	88,0
6"	132	260	1200	1 1/8" - 8UNC x L100	M30 - 3.50P x L100	360	245	300	182,0

## Floating Ball Valve Torque Value

(Unit : N·m)

Size (In.)	Class 150	Class 300	Class 600	Class 900	Class 1500	Class 2500
1/2"	8	10	18	20	35	48
3/4"	10	16	23	38	46	60
1"	20	25	40	70	120	153
1 1/2"	49	70	94	150	170	210
2"	60	82	130	210	310	414
2 1/2"	94	105	152	320	440	580
3"	105	145	201	450	600	710
4"	160	260	370			
5"	410	690				
6"	650	1100				
8"						

\* To apply actuator selection, 25% of safety factor shall be recommended.

## Floating Ball Valve Flow Coefficient (CV)

Size (In.)	Class 150	Class 300	Class 600	Class 900	Class 1500	Class 2500
1/2"	25	25	25	25	25	25
3/4"	50	50	50	50	50	50
1"	90	90	90	90	90	90
1 1/2"	230	230	230	230	230	230
2"	420	420	420	420	420	330
2 1/2"	610	610	610	610	610	520
3"	1150	1150	1150	1150	1150	810
4"	2600	2600	2600			
5"	3100	3100				
6"	4800	4800				
8"						

\* Other materials can be applied upon request

## Ball Valve Constition Table

CONSTRUCTION	2-Piece , 3-Piece Body	SEAT MATERIAL	NYLON
	Floating , trunnion Ball		POM
END CONNECTIONS	Socket / Butt Weld (ANSI/JIS)	SEAL MATERIAL	NEOPRENE
	Extended Pipe Butt / Plain Weld		METAL
	Male / Female Thread		VITON
SIZE RANGES	ANSI, JIS, DIN, SAE, ISO Flange	SEAL MATERIAL	VITON AED / GLT
	1/2" ~ 8"		NBR
PRESSURE RATINGS	ASME CLASS 150 to 2500	GASKET MATERIAL	HNBR
	JIS 10K to 30K		EPDM
	SAE 3000 to 6000		KALEZ
TEMPERATURE RANGES	ISO PN 250 to 400	GASKET MATERIAL	AFLAS
	From -46°C to 230°C		316 Sprial Gasket
BODY MATERIAL	Optional -196°C to 450°C	BOLT MATERIAL	ASBESTOS
	STAINLESS STEEL - A351 CF8M , A351 CF3M		Graphite
	A182 F51 , A182 F316		ASTM & JIS Grade Material with Coating
SEAT MATERIAL	CARBON STEEL - A352 WCB , A352 LCB , A352 LCC	OTHER	(Hot Dip Galvanize, PTFE Coating etc.)
	ALLOY - ALLOY 400 , INCONEL 625		Bare Stem
	PTFE		Electric Actuator
	RTFE		Pneumatic Actuator
	PCTFE		Manual Gear
PEEK	Actuator Mount		
	UHMWPE		

## Payment Terms

The price of the goods shall be the Seller's quoted price or, where no price has been quoted, the price listed in the Seller's published price lists current at the date of acceptance of the order. All prices quoted are valid for 30 days only or until earlier acceptance by the Buyer, after which time they may be altered by the Seller without giving notice to the Buyer.

## Ordering Information

Orders must be in writing and are subject to approval and confirmation upon receipt of Seller. Cancellation of orders for standard items may not be made without written consent. Orders for material made special to customer's specifications may not be canceled without payment to Hy-Lok Corporation for all expenses involved, and then only by special permission.

## Limited Warranty

Products are guaranteed against defects in material and workmanship for a period of one (1) year from the date of shipment. This warranty is limited to replacement or repairing and any material which upon our inspection on our premises we find to be thus defective. Transportation charges on material returned must be prepaid.

## Limitation of Liability

Seller shall not be liable to the Buyer or to any other person, firm, or corporation for any incidental or consequential loss, damage, or injury arising out of any breach of warranty or any other act or default relating to Buyer's order or to products or services provided to Buyer, even if any such loss, damage, or injury is caused by Seller's negligence. The correction of defects as provided in the warranty statement above shall constitute Seller's full obligation with respect to all claims and Seller's liability shall in no event exceed the unit purchase price of the product in question.

## Notice of Claims

Immediately upon receipt of the goods, Buyer shall inspect the same. Any claims for shortage must be made within ten (10) days after Buyer's receipt. All other claims, including, but not limited to, for alleged defective goods, must be made within fifteen (15) days after Buyer learn of the fact upon which such claim is based.

## Return of Material

Materials may not be returned for credit without our written permission. Returned material must be accompanied by instructions as to disposition.

## Warning

In order to ensure proper and continued performance of our products, regular inspection and maintenance is required to detect any corrosion or unusual wear of metallic and nonmetallic parts.

## Notice

The terms and conditions set forth above are part of Hy-Lok Corporation's products. They may not be added to, modified, superseded, or otherwise altered, except by a written instrument signed by an Authorized representative of Hy-Lok Corporation. Please understand that by sending your purchase order or any other document for any product(s) offered for sale by Hy-Lok Corporation or accepting delivery for such product(s), you agree to the terms and conditions above. Any different or additional terms and conditions in your acceptance of this offer are objected to.



## Sales & Service Network

Hy-Lok's service from worldwide network system assorted with high Technology and Know-How will be provided at themoment you choose "Hy-Lok". Hy-Lok has built international distribution network to achieve the goal of prompt delivery and provide the best service.

### Local Distributor

Office  
Seoul Office / Daejeon Office / Gwangju Office / Suwon Office

Agents  
Seoul, Busan, Ulsan, Masan, Changwon, Gwangju, Yeosu,  
Gwangyang, Daegu, Gumi, Pohang, Ulchin, Daejeon, Seosan

### International Master Distributor

- USA / Hy-Lok USA Inc.
- CANADA / Hy-Lok Canada
- SINGAPORE / Hy-Lok Asia Valves & Fittings
- CHINA / Hy-Lok China Co., Ltd.
- SAUDI ARABIA / Al-ABDULKARIM Holding Co.
- NETHERLANDS / Hy-Lok Europe BV
- AUSTRALIA / Hy-Lok Australia P/L
- NIGERIA / Hy-Lok Nigeria

### Regional Distributors

#### EUROPE

Netherlands  
Spain  
Norway  
United Kingdom  
Italy  
Germany  
Belgium  
Czech  
Poland  
Denmark  
Finland  
France

#### AFRICA

Nigeria  
Egypt  
Angola

#### MIDDLE EAST

Saudi Arabia  
UAE  
Kuwait

#### ASIA

Singapore  
Thailand  
Malaysia  
Brunei  
Philippines  
Vietnam  
China  
Japan  
Indonesia  
India  
Pakistan  
Kazakhstan  
Taiwan

#### OCEANIA

Australia

#### AMERICA

USA  
Canada  
Brazil  
Argentina  
Bolivia  
Mexico  
Chile  
Colombia  
Peru  
Venezuela